

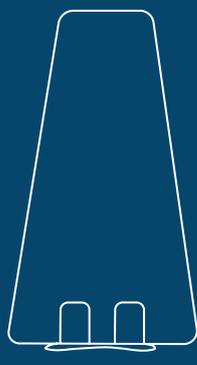



ACOUSTICS

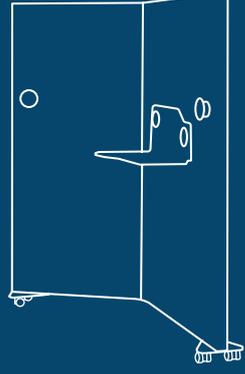

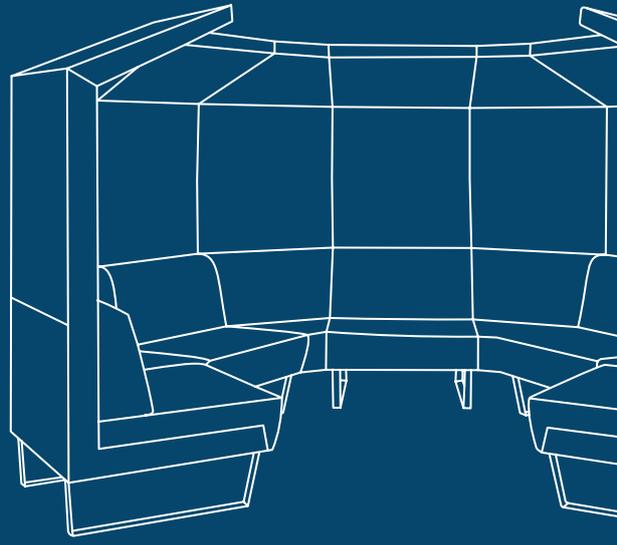

Who we are?

We are a family-run production company that, through the idea, enthusiasm and work of the entire team, has transformed from small carpentry into a office furniture and acoustic solutions manufacturer. We create products in cooperation with creative designers and through rigorous selection of each element of our products to guarantee your satisfaction and comfort even during long hours of use.

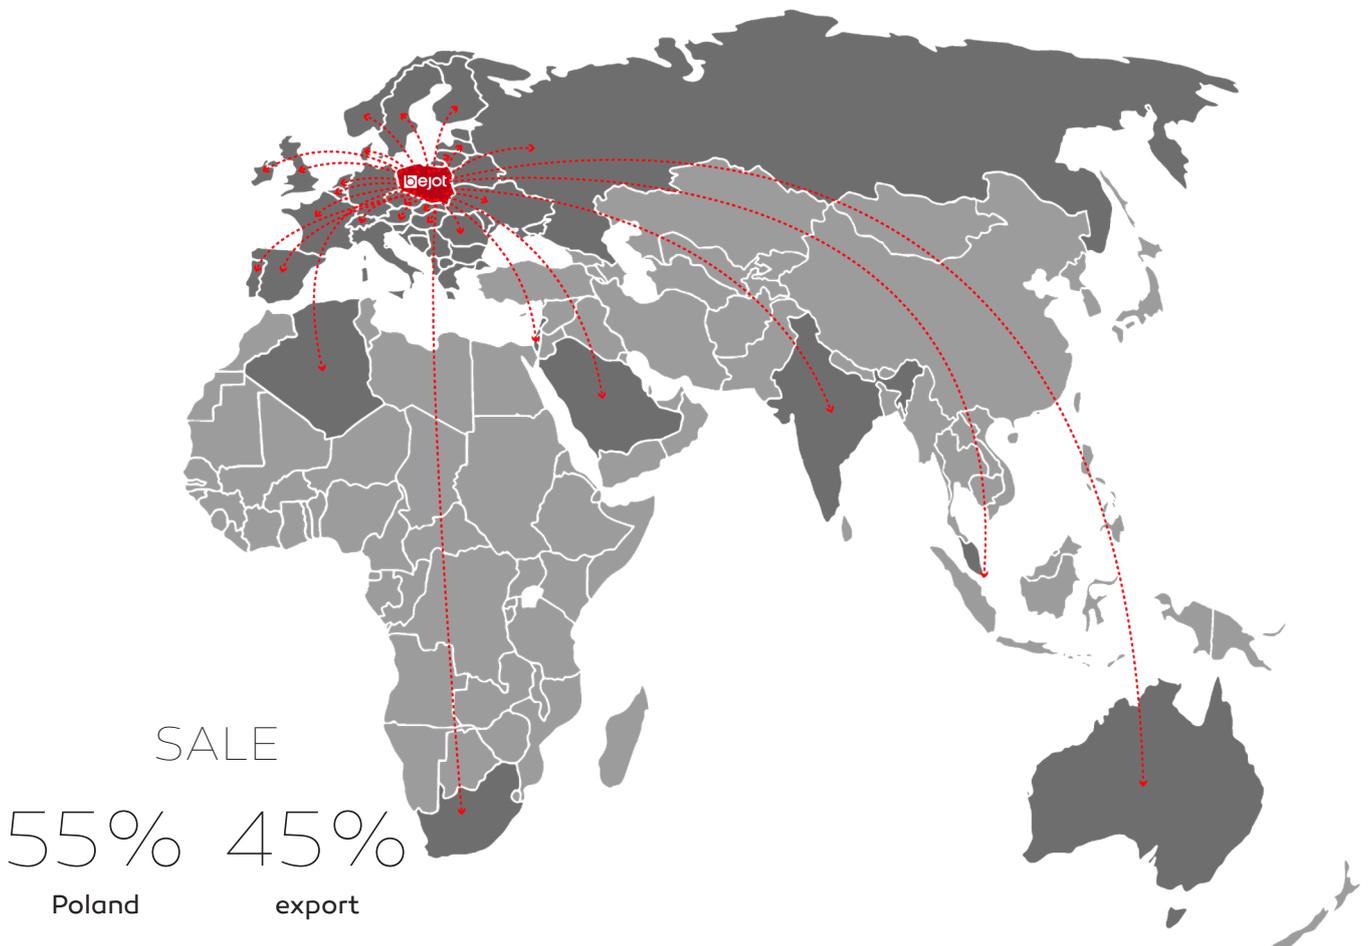

Mission statement

Bejot is a company, where the human being is put first above all. His needs, comfort and feeling of aesthetics are for us priorities. We want to be a partaker and an initiator of changes unfolding within the current work conception model as well as an evolution in the field of creation of human friendly spaces for learning, work and some rest.

Our mission is to bring the relations between the human being and the space together and to bring about a harmonious relation between these two things. Nevertheless, we attach a great importance to capturing the beauty in everyday objects which establishes a kind of dialog between the pure form and the functionality.

30

years of experience

220

over employees

20 000

products monthly

10 000m²

office and production space



What is with the acoustics



Every day we think about, how to make the interior more pleasant for you, that's why a few years ago, as a Bejot company, **we took part in a research consortium on acoustic properties of materials** which eliminate noise in workplaces. This allowed us to get to know the issue of acoustics, create and improve products that **support the improvement of interior acoustics** not only in offices, but also in public spaces and HoReCa. With us, learn more about acoustics and solutions that will help us solve your acoustic problem.

Sound sources



20 dB¹
200 µPa
whisper



60 dB¹
20 000 µPa
office



80 dB¹
200 000 µPa
busy street



120 dB¹
20 000 000 µPa
jet aircraft

How noise affects us?

67%

Decrease in work accuracy².

>40%

Employees are not able to fully perform their work².

64%

Employees feel discomfort due to noise caused by calls and telephones².

30%


Decrease in employee productivity².

¹ FIS, *The guide to office acoustic*, ISBN 978-0-9565341-1-8, 2015

² Evidence Space, *Improving employee productivity by reducing noise*, British Gypsum, Coventry, 2015

The sound of silence


What good acoustics can change?

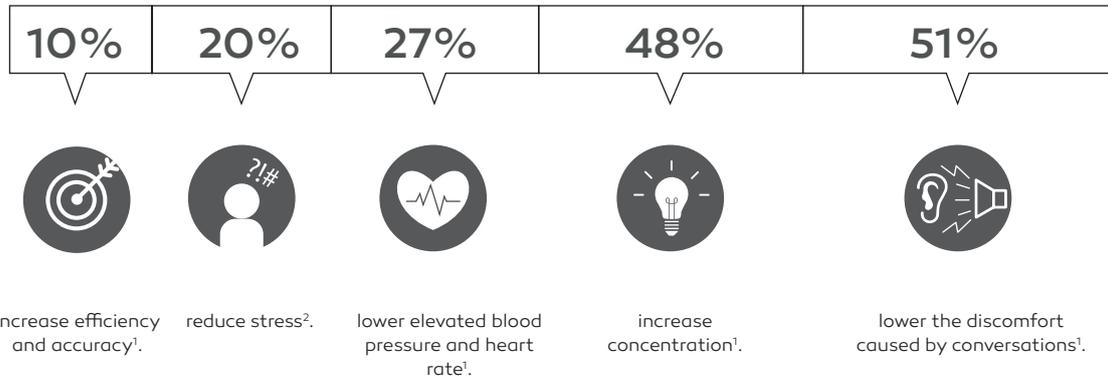


Costs of bad acoustics




Basic acoustic phenomena




Reflection



Absorption



Diffusion

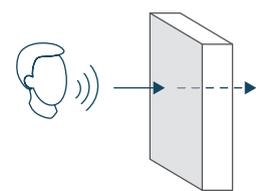

Penetration

¹ Evidence Space, *Improving employee productivity by reducing noise*, British Gypsum, Coventry, 2015

² Cowan, *The Effect of sound people*, Wiley, Chichester, 2016, 93–95

Choose **the best solution**

Classification of sound absorbing products – is based on the value of the sound absorption coefficient α_w according to EN ISO 11654. Materials and acoustic products are **classified in 5 classes** marked from A to E. **Class A means the highest sound-absorbing properties** and products for which $\alpha_w < 0,15$ are not classified as sound absorbing.

Sound absorption class	Weighted sound absorption coefficient α_w
A	0,90–1,00
B	0,80–0,85
C	0,60–0,75
D	0,30–0,55
E	0,15–0,25
Unrated	0,00–0,10

Target	Solution	Proposed products
Reduction of excessive reverberation in the interior	Sound absorption	Alberi Wall, Acoustic Peak, RollWall, Selva Free, Selva Sky, Selva Tower, Selva Wall, VooVoo 9xx Cave / Treehouse/ Beachhouse
Increased privacy at the workplace	Screening	Alberi Screen, Selva Free, Quadra Phonebox, Quadra Sha, RollWall, VooVoo 9xx Cave / Treehouse Double / Beachhouse
Improving speech intelligibility	Sound absorption and screening	All Bejot acoustic products in the right configuration
Noise reduction	Sound absorption and screening	All Bejot acoustic products in the right configuration

Create your **quiet space**



Principles of acoustic adaptation of interiors:

- 1.** It is important to take into account the purpose of the office and the nature of the work of people staying in it (phone conversations, conversations between employees, teamwork, the need of eye contact).
- 2.** In rooms, it is the most effective to adapt the ceiling and two adjacent perpendicular walls (one of the parallel pairs).
- 3.** Screening noise sources – the higher the screen, the greater its effectiveness. Screens at the workplace should be higher than a sitting man. The septate integrity is also important.
- 4.** A closer location of acoustic products to the sound source will allow more sound to be absorbed.
- 5.** The organization of the workplace can help you with improvement of the acoustic, for example, the separation of quiet areas, communication areas and teamwork areas.
- 6.** Filling the space with soft elements helps to reduce the reverberation time – eg carpeting, upholstered furniture, open bookshelves.
- 7.** Ensuring proper acoustics indoors and avoid design flaws requires choosing proper products and installing them in the right places – if necessary, ask an acoustician for advice.

Would you like to improve acoustics of the interior under a watchful guidance of a professional?

Contact with us and use an assistance of our acoustician.



TREEHOUSE
TREEHOUSE DOUBLE
ALBERI FREE
MOMO 102 WHITE



ALBERI FREE



design:
Maciej Karpiak




AL SC 1110




AL SC 1580



The sound absorption coefficient α_s relative to frequency [Hz] according to PN-EN ISO 354:2005

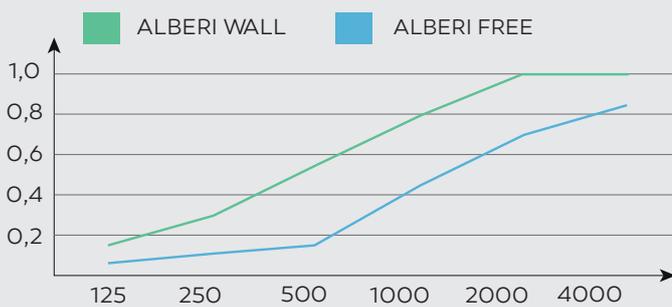


Equivalent acoustic surface area a single object A_{obj} [m²] relative to frequency [Hz] according to PN-EN ISO 354:2005

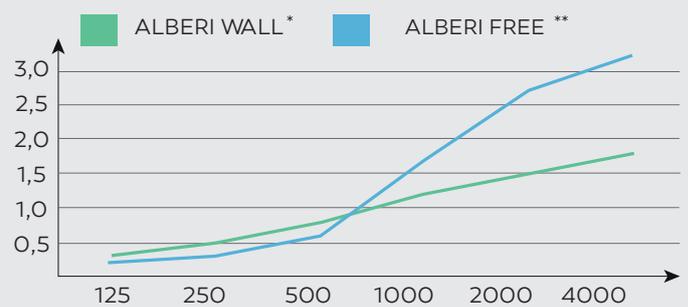


* averaged result for one object based on composition testing
** results for Alberi ALSC1580

	Weighted sound absorption coefficient α_w according to PN-EN ISO 11654:1999	Sound absorption class according to PN-EN ISO 11654:1999
Alberi Free	0,3 (H)	D
Alberi Wall	0,55 (MH)	D

ALBERI FREE




ALBERI WALL



A – decorative felt
B – non-woven fabric
C – hard core


ALBERI WALL

Four **seasons**

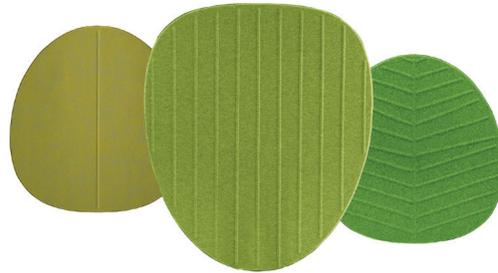

SPRING

AL PSC 1110 W1 + AL PSC 1580 W2 + AL PSC 1110 W3

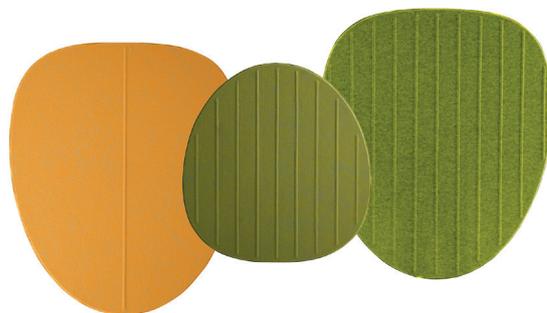

SUMMER

AL PSC 1580 W1 + AL PSC 1110 W2 + AL PSC 1580 W3



AUTUMN

AL PSC 1110 W2 + AL PSC 1580 W3 + AL PSC 1110 W1 + AL PSC 1580 W2 + AL PSC 1110 W3





WINTER

ALPSC 1580 W3 + ALPSC 1110 W1 + ALPSC 1580 W1 + ALPSC 1110 W2 + ALPSC 1580 W2

SELVA




design:
Ronald
Straubel

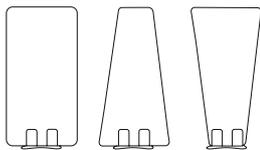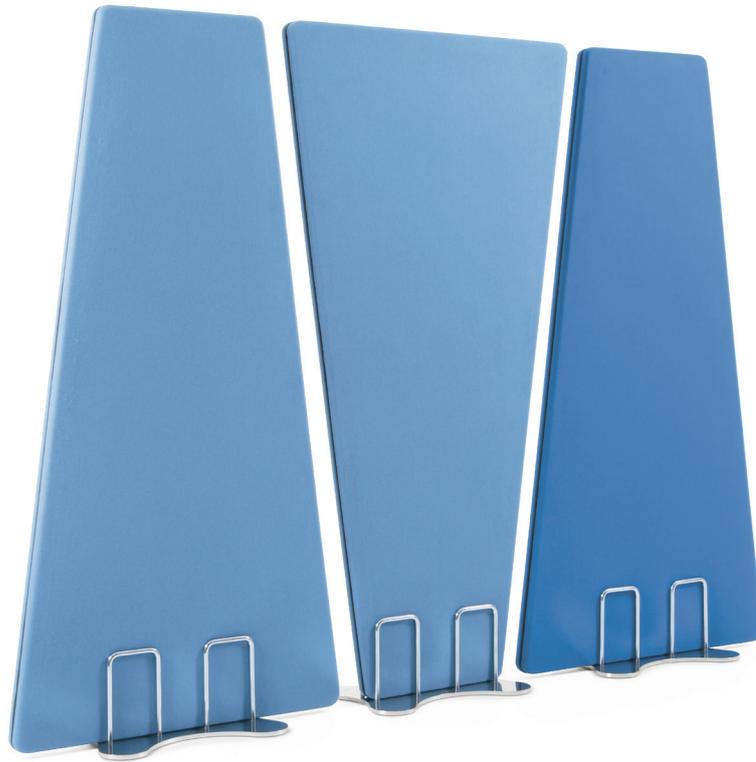


SELVA FREE

The sound absorption coefficient α_s relative to frequency [Hz] according to PN-EN ISO 354:2005

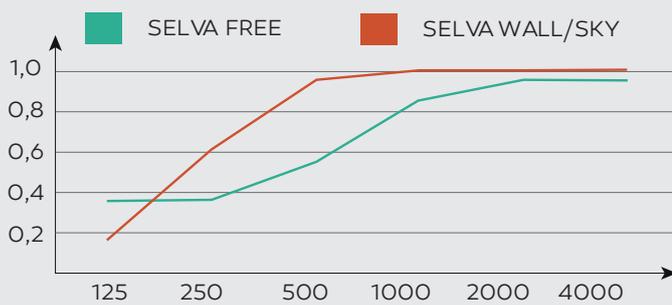


Equivalent sound absorption area of the single object A_{obj} [m²] relative to frequency [Hz] according to PN-EN ISO 354:2005

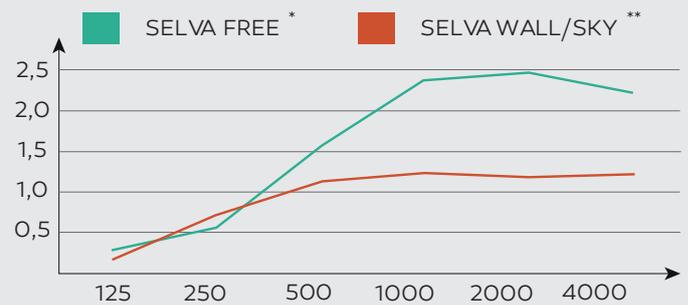

* results for screen 800x1600
** results for screen 1800x600


	Weighted sound absorption coefficient α_w according to PN-EN ISO 11654:1999	Sound absorption class according to PN-EN ISO 11654:1999	Weighted acoustic efficiency of screen according to PN-ISO 10053:2001 [dB]
Selva Free	0,55 (H)	D	8
Selva Sky	0,9	A	-
Selva Wall	0,9	A	-



SELVA FREE



A – fabric
B – non-woven fabric
C – hard core

SELVA WALL/SKY



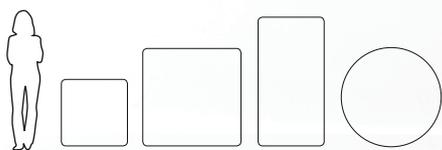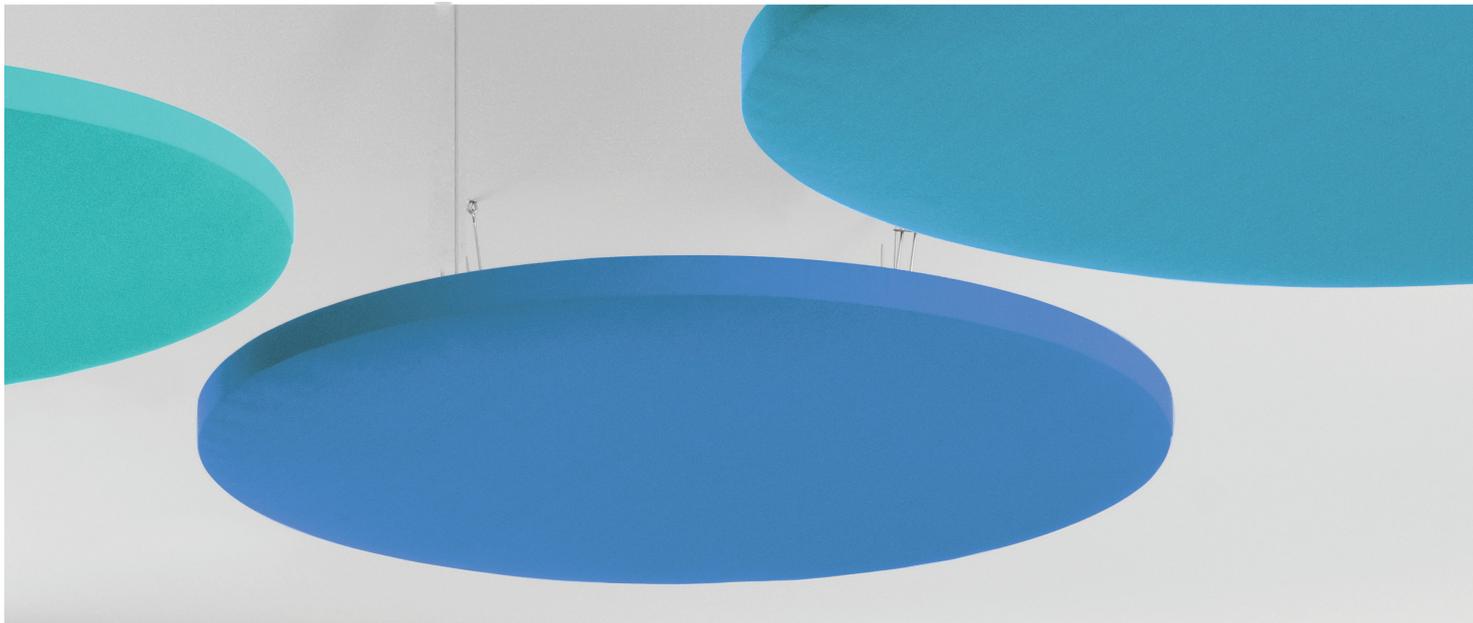


SELVA SKY
SV PSF D12



SELVA WALL

SV PSC 6
SV PSC 12

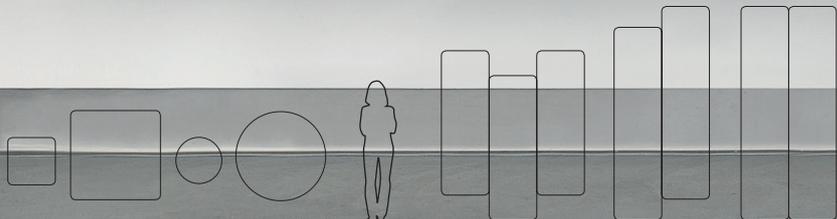


design:
Bejot
Development
Team

SELVA DESK




SV DK

Estimated equivalent sound absorption area of the single object A_{obj} [m²] relative to frequency [Hz] *

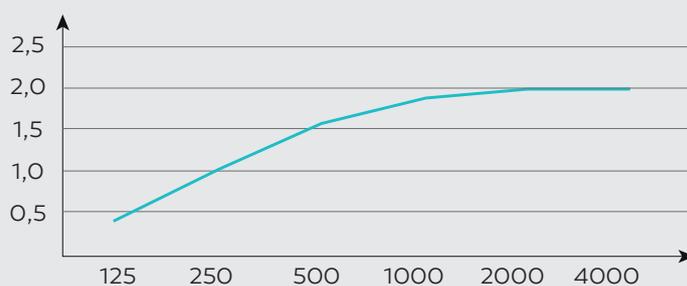


* results for SV DK 16 H2

SELVA DESK



A – fabric
B – non-woven fabric
C – hard-core

SELVA DESK

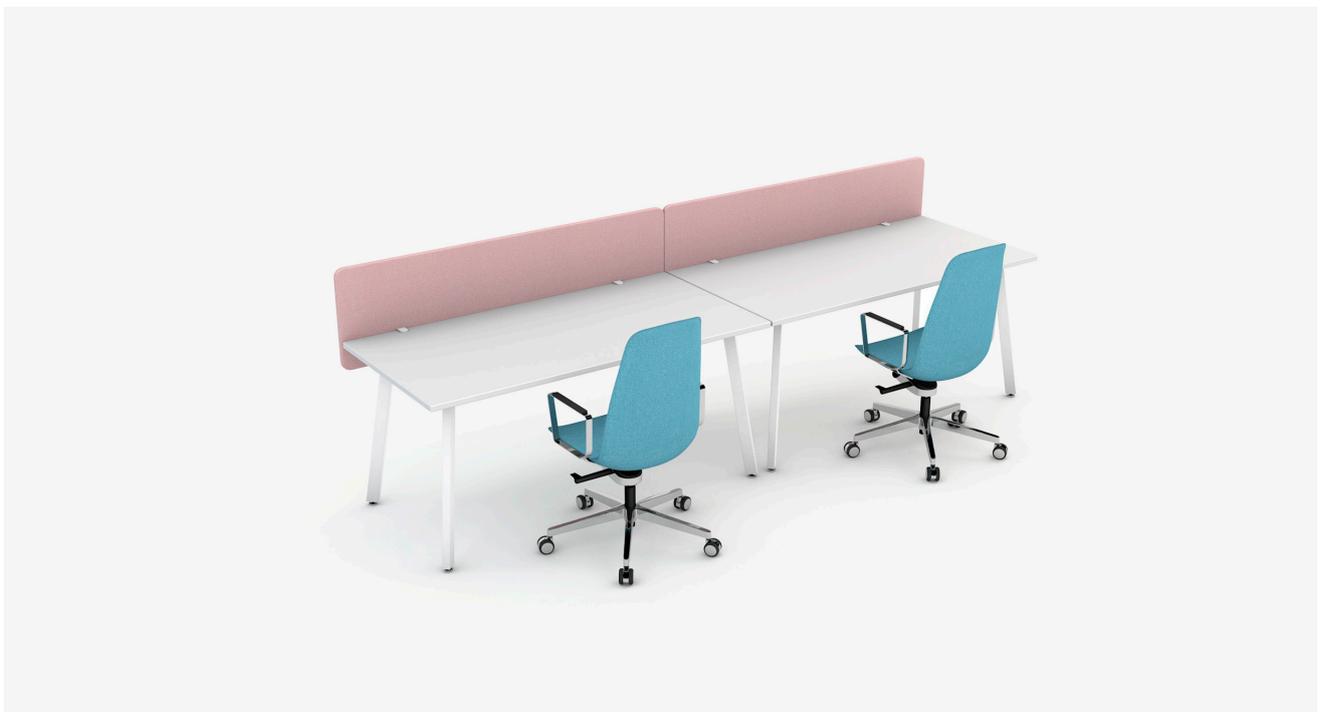




SELVA TOWER

design:
Bejot
Development
Team




SV TW

The sound absorption coefficient α_s relative to frequency [Hz] according to PN-EN ISO 354:2005

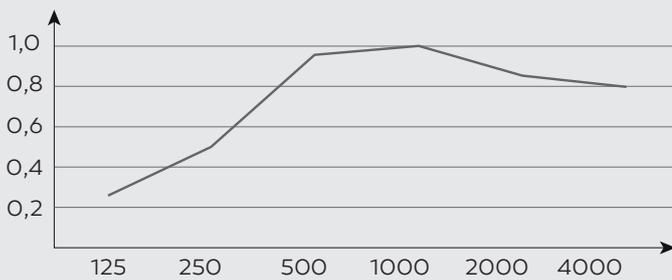


Equivalent sound absorption area of the single object A_{obj} [m²] relative to frequency [Hz] according to PN-EN ISO 354:2005

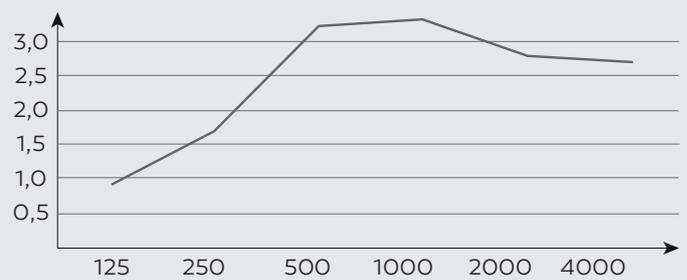

	Weighted sound absorption coefficient α_w according to PN-EN ISO 11654:1999	Sound absorption class according to PN-EN ISO 11654:1999
Selva Tower	0,8	B

SELVA TOWER




- A – fabric
- B – non-woven fabric
- C – supporting structure

ACOUSTIC PEAK




Estimated equivalent sound absorption area of the single object A_{obj} [m²] relative to frequency [Hz] *

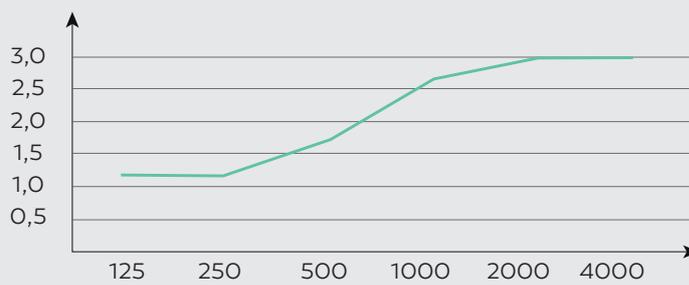

* results for AP TW + AP RF

ACOUSTIC PEAK




- A – fabric
- B – absorbent material
- C – perforated construction

ROLLWALL


design:
Bejot
Development
Team




RW

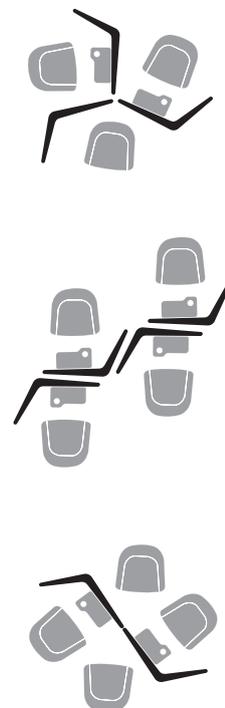

The sound absorption coefficient α_s relative to frequency [Hz] according to PN-EN ISO 354:2005

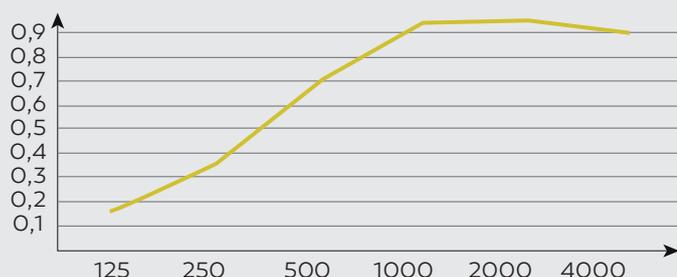


Equivalent sound absorption area of the single object A_{obj} [m²] relative to frequency [Hz] according to PN-EN ISO 354:2005

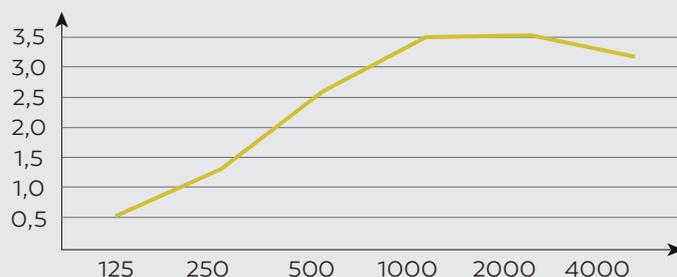

	Weighted sound absorption coefficient α_w according to PN-EN ISO 11654:1999	Sound absorption class according to PN-EN ISO 11654:1999
Rollwall	0,65 (MH)	C

ROLLWALL




- A – fabric
- B – non-woven fabric
- C – supporting structure


VOO VOO 9XX




VV 922 BOX + TB

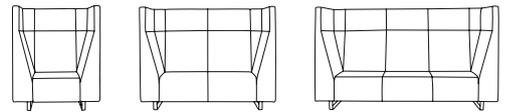

The sound absorption coefficient α_s relative to frequency [Hz] according to PN-EN ISO 354:2005

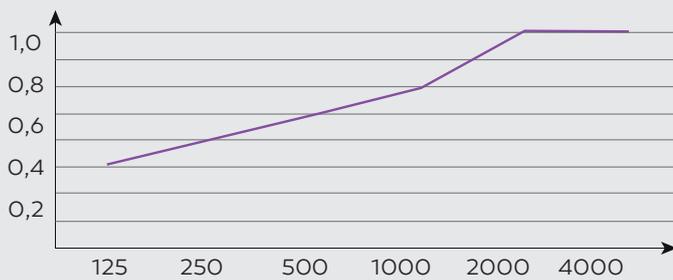


Equivalent sound absorption area of the single object A_{obj} [m²] relative to frequency [Hz] according to PN-EN ISO 354:2005 *

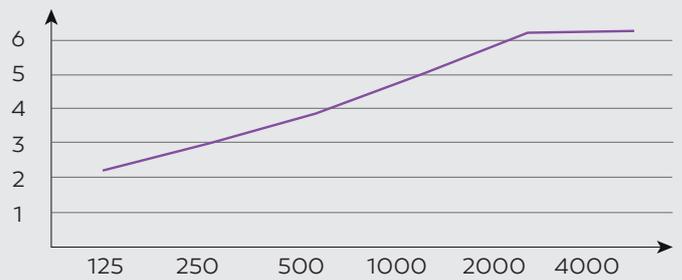

* results for VV922

	Weighted sound absorption coefficient α_w according to PN-EN ISO 11654:1999	Sound absorption class according to PN-EN ISO 11654:1999	Weighted acoustic efficiency of screen according to PN-ISO 10053:2001 [dB]
VooVoo 9xx	0,6 (H)	C	7

VOO VOO 9xx



A – fabric
B – polyurethane foam
C – supporting structure

QUADRA SHA

QUADRA PHONEBOX

design:
Bejot
Development
Team




QD PB




QD SHA R

The sound absorption coefficient α_s relative to frequency [Hz] according to PN-EN ISO 354:2005

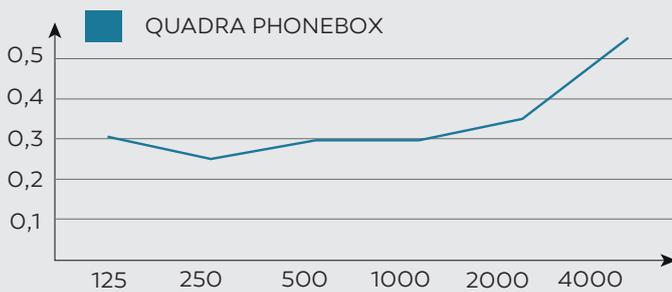


Equivalent sound absorption area of the single object A_{obj} [m²] relative to frequency [Hz]

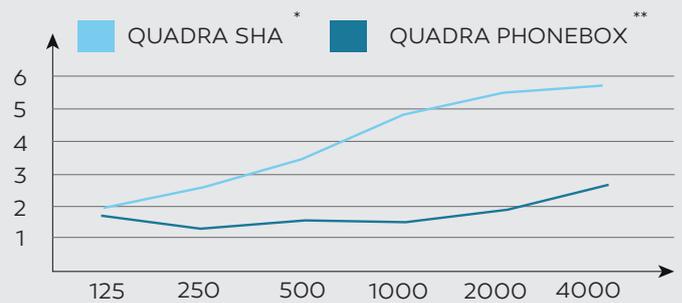

* estimated value
** according to PN-EN ISO 354:2005

	Weighted sound absorption coefficient α_w according to PN-EN ISO 11654:1999	Sound absorption class according to PN-EN ISO 11654:1999	Weighted acoustic efficiency of screen according to PN-ISO 10053:2001 [dB]
Quadra Phonebox	0,35 (H)	D	20

QUADRA PHONEBOX/ SHA



A – fabric
B – non-woven fabric
C – hard core




CAVE

design:
Dymitr Malcew




Estimated equivalent sound absorption area of the single object A_{obj} [m²] relative to frequency [Hz] *

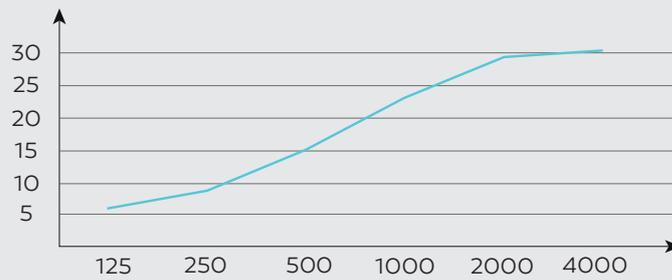

* results for layout 6xCV STR + 2xCV 60

CAVE



- A – fabric
- B – absorbent material
- C – supporting structure
- D – non-woven fabric



CAVE
LUMIWOOD
CUBE



TREEHOUSE



design:
Dymitr Malcew




TH D




TH

Estimated equivalent sound absorption area of the single object A_{obj} [m²] relative to frequency [Hz] *

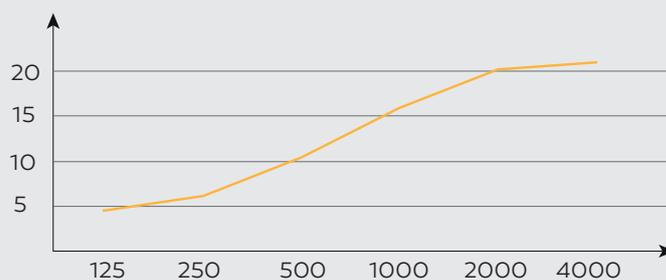

* results for upholstered version TH D with a wall

TREEHOUSE (upholstered)



- A – fabric
- B – non-woven fabric
- C – supporting structure

BEACHHOUSE




BH




BHW

Estimated equivalent sound absorption area of the single object A_{obj} [m²] relative to frequency [Hz] *

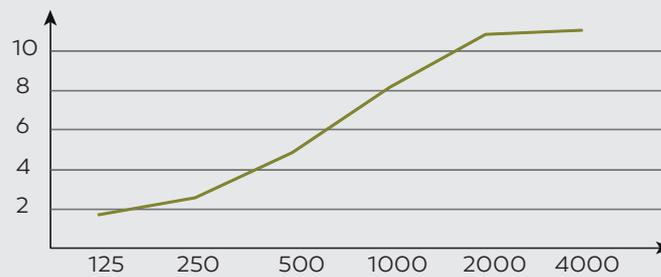

* results for the upholstered version


BEACHHOUSE




- A – fabric
- B – non-woven fabric
- C – supporting structure
- D – absorbent material

SILENT BLOCK

design:
Bejot
Development
Team

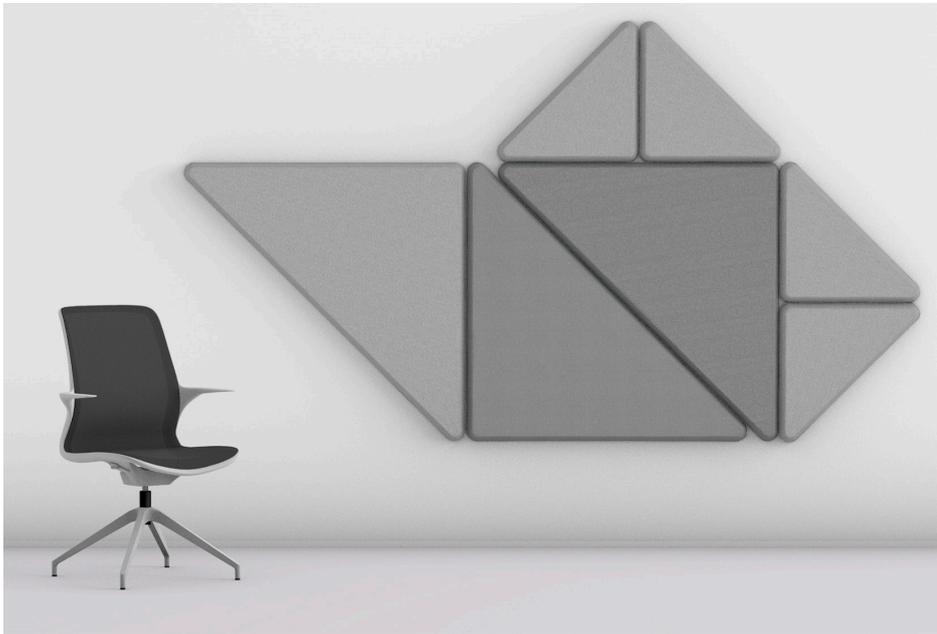


Estimated equivalent sound absorption area of the single object A_{obj} [m²] relative to frequency [Hz] *

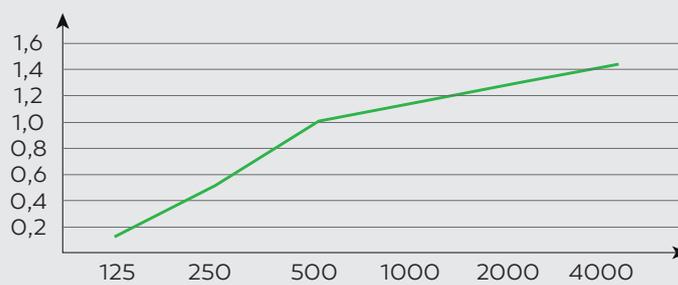

* results for SB SQ120

SILENT BLOCK



- A – fabric
- B – polyurethane foam
- C – supporting structure



SILENT BLOCK
SKY 3D

”

Sukces, jaki odnieśliśmy,
ma również ciemną stronę.
Nasi klienci mają bardzo
wysokie wymagania.

Bill Gates



SILENT BLOCK SKY 3D
OVIDIO



SOCIAL SWING




design:
Maciej Karpiak




SINGLE

Estimated equivalent sound absorption area of the single object A_{obj} [m²] relative to frequency [Hz]

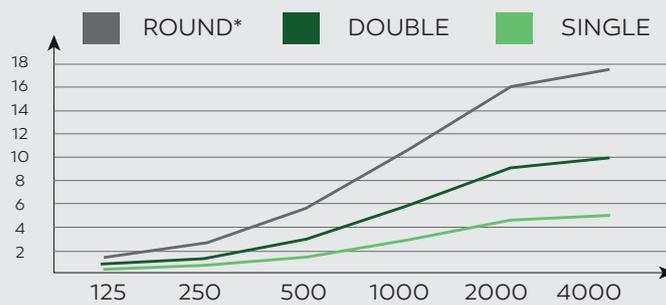

* results for layout of four rocking chairs and one sofa

SOCIAL SWING ROUND



- A – fabric
- B – absorbent material
- C – supporting structure



DOUBLE



ROUND

Collections with acoustics elements

PENTA



PN P600

PN T600

PN P1050 R/L

PN PO600 R/L

PN PO1050 R/L

PN PO600 R/L
+ 3x PN SC600

PN PO1050 R/L
+ 2x PN SC600
+ PN SC450

QUADRA



QD PO690
+ 2x QD P1

QD P690
+ QD P1R/L

QD PO690
+ QD P1L
+ 2x QD SC 690

QD PO690
+ 3x QD SC 690

QD PO690

QD PO690
+ QD SC 690
2x QD SC 490

QD C

QD C
+ 2x QD SC 690




QD P1650

QD PO1650


QD PO1650
+ QD SC 1650
+ 2x QD SC 690

QUADRA/PENTA WALLS

Estimated equivalent sound absorption area of the single object A_{obj} [m²] relative to frequency [Hz] *

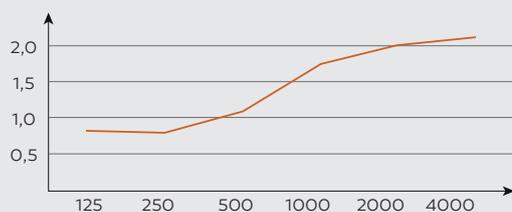

* results for QD SC1650



A – fabric
B – non-woven fabric
C – hard core

U_FLOE



UFW100

UFW2000

UFW30000

UFW101

UFW2011 + UF SC D12

UFW30111 + UF SC 12



UFW121

UFW2211 + UF SC D12

UFW32111 + UF SC 12



UFP2TM

UF BOX FS TB


UF BOX TB

STEP OVER TB L



STEP OVER FS

U_FLOE WALLS

The sound absorption coefficient α_{relative} relative to frequency [Hz] according to PN-EN ISO 354:2005

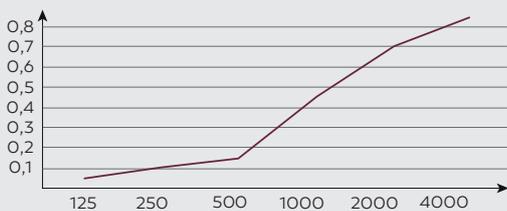

Estimated equivalent sound absorption area of the single object A_{obj} [m²] relative to frequency [Hz] *

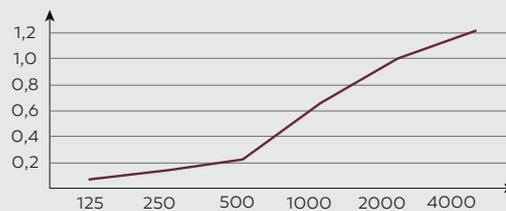

A – decorative felt
 B – non-woven fabric
 C – hard core

* results for version 1200x1200

The colors presented do not constitute an offer within the meaning of the law. The manufacturer reserves the right to introduce changes in the design and parameters of products offered without changing their overall nature.



www.bejot.eu

Bejot Sp. z o.o., ul. Wybickiego 2A,
Manieczki 63-112 Brodnica n/Poznań, POLAND
tel.: +48 (61) 281 22 25, fax: +48 (61) 281 22 54,
e-mail: biuro@bejot.eu
edition 01/2019



Our partner in the
Czech Republic:
Progress Interior s.r.o.
PRAHA / CHRUDIM